

MDV MANIFOLD

MDV-VERTEILERVENTIL


VALVOLA COLLETTORE MDV

MDV MANIFOLD VALF

MDV MANIFOLD VALVE



МОДУЛЬНЫЙ КЛАПАН MDV

MDV集成阀

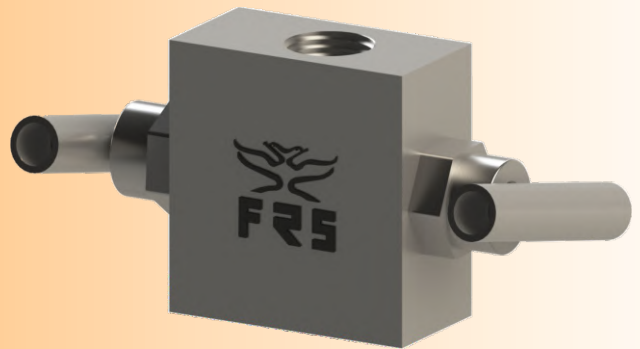

MDV MANIFOLD VALF MDV MANIFOLD VALVE

MDV

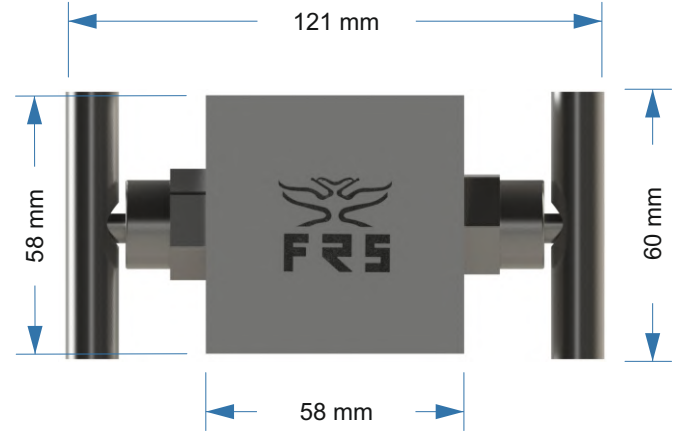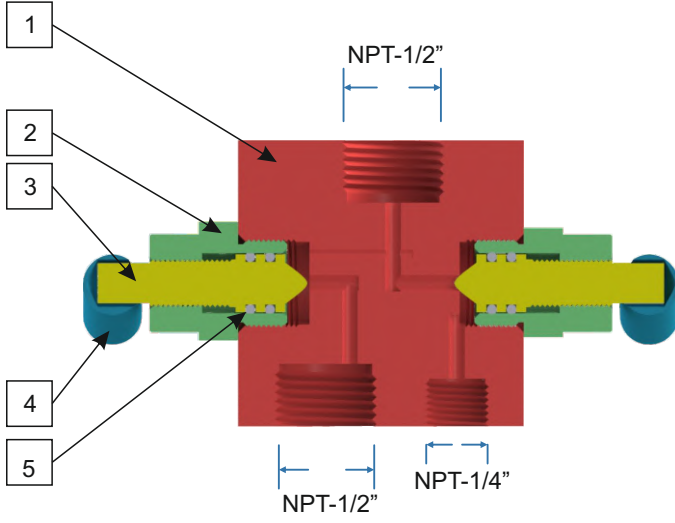

PARA LİSTESİ PART LIST

No	PARA ADI	PART NAME
1	GÖVDE	BODY
2	İĞNE KOVANI	SPINDLE CASE
3	İĞNE	SPINDLE
4	KOL	HANDLE
5	O-RING	O-RING

GENEL ÖLÇÜLER / OVERALL DIMENSIONS

MALZEME / MATERIAL

GÖVDE / BODY

ASTM A105 / C45

NİPEL / NIPPLE

ASTM A105 / C45

KÜRE / BALL

AISI 316 / X5CrNiMo17-12-2

TEFLON / TEFLON

PTFE

KÜRE MİLİ / STAM

AISI 316 / X5CrNiMo17-12-2

ÖZELLİKLER

MDV serisi manifold vanalar 3 yulio olup, endüstriyel uygulamalarda kullanılmaktadır. Doğalgaz, LPG, hava ve diğer aşındırıcı olmayan gazlarla çalışan yüksek basınç hatlarında, manometre vb. Cihazları yüksek basınç etkisinden korur.

FEATURES

MDV series manifold valves are three way, used for industrial processes. They protect the manometer and similar equipment against the effect of high pressure at the high pressure lines that operate with natural gas, LPG, air and other none-abrasive gases.

Teknik Özellikler / Technical Features

Bağlantı	MDV: 1/2" Npt (giriş) x 1/2" Npt (çıkış) x 1/4" Npt (tahliye)
Gövde Dayanım Basıncı	ANSI 600
Çalışma Sıcaklığı	-10 °C / +180 °C
Malzeme Tipleri ve Standartları	Paslanmaz Çelikler Teflon / PTFE
Kullanım Alanları	Şehir şebekeleri ve endüstriyel kullanımlarda; doğalgaz (grup Ch4), LPG, propan hava (%79 Nitrojen, %20 Oksijen) ve diğer aşındırıcı olmayan gazlar

Connections	MDV: 1/2" Npt (inlet) x 1/2" Npt (outlet) x 1/4" Npt (drain)
Resistance Pressure of Body	ANSI 600
Working Temperature	-10 °C / +180 °C
Material Types and Standards	Stainless Steel Teflon / PTFE
Applications	Suitable for natural gas (group Ch4), LPG, propane air(%79 Nitrogen, %20 Oxygen) and other non corrosive gases; for both domestic and industrial use.